




DATA MANAGER 500

programmable controller with display

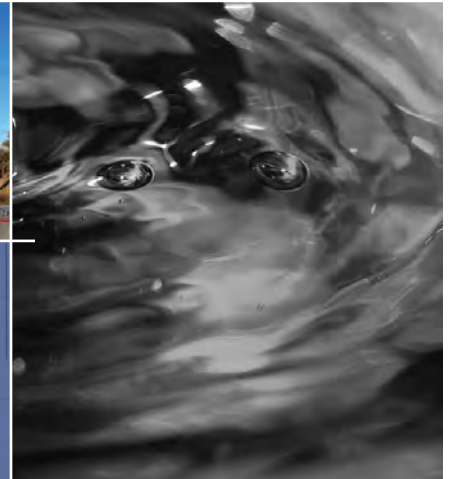

PRODUCT FEATURES

- Real-time process monitoring and control
- Instantaneous flow monitoring
- Pump control with high/low set points
- 4-20 analog input
- External or battery powered



High-definition accuracy and resolution

Real-time display/control in one device

The features you requested at a price that makes sense

Jim Butler

303-947-4202 (cell) • Dynotekjib@cs.com

13931 W. 54th Ave. • Arvada CO 80005

303-234-1409 (phone)

720-479-8980 (fax)

PRODUCT FEATURES AND SPECIFICATIONS

- Rugged wall-mount
- Programmable controller
- Easy to program
- Large keypad for gloved use
- High 16-bit resolution ($\pm 0.002\%$ FS)
- Real-time display
- High/low alarm/relay outputs
- User replaceable batteries
- External power option
- SCADA compatible, without the cost
- 4-20mA input channel

HIGH DEFINITION FEATURE

Dynotek Data Manager Products

The 16 Bit Resolution inherent in Dynotek's Data Manager improves overall accuracy of measurements by providing substantially better resolution of readings regardless of the underlying accuracy of the sensor input.

Analog sensors are essentially continuous in output, with infinite resolution possible. In converting the data from analog to digital, much of the stated accuracy can be lost

This means that with a 1000 psi pressure transducer, the most accurately that actual water depths can be read with 12 bit is +/- 0.5 ft. With 16 bit resolution, changes in depth of as little as 0.04 ft can be measured. This level of accuracy can be critical in many monitoring and testing operations.

Specifications subject to revision r2001

Warranty	1 year
Device Material	Injected plastic
Weight	4.5 lbs.
Dimensions	6.0" (w) X 7.0 (h) X 3.75" (t)
Temperature Range (Op)	-25C to +70C (-13F to 158F)
Power	
External drop to 12-18 VDC	Y
Int. Power - Lithium	Y
Loop Power - Alkaline	Y
User Replaceable	Y
Probe Input Electrical	
Analog	4-20mA
Channels	1 analog
Resolution	16-bit resolution
Accuracy	$\pm 0.002\%$ FS
Probe Communication	
Loop Source Voltage	18 VDC
SCADA	SCADA compatible (1 channel)
External Control Capability	
Alarms/Relay	1
Contact Rating	0.3A @ 125VAC, 1A @ 30 VDC
User Interfaces	
Keypad	Y
Display	1.92" (w) X 0.8" (h)

Jim Butler • 303-947-4202 (cell) • Dynotekjb@cs.com

13931 W. 54th Ave. • Arvada CO 80002 • 303-234-1409 (phone) • 720-479-8980 (fax)